



Kivo Commercial Light Therapy Stand

Applicable Products

- Manual Commercial Stand
- Optional Dual Panel Adapter Kit



<https://help.KivoTherapy.com>

Scan the QR code with your mobile device or follow the link for more user-guides and videos related to Kivo products, treatment calculators and programmes.

Contents

- Contents2**
- Safety Information3**
- Package Contents..... 5**
 - Manual Stand5
 - Dual Adapter Kit (optional)5
 - Premium Dual Adapter Kit (optional) 6
- Building your Panel System.....7**
 - Raising or Lowering the Panel..... 10
 - 5000 or 6000 Series Panels 11
 - Dual Panel Bars 12
- Power 14**
- Specifications 15**
 - Manual Stand 15
 - Dual Panel Adapter Kit 15

Safety Information

IMPORTANT

If you do not understand these directions, or if you have issues about the safety of the installation of this product, please call a qualified technician, or contact us. Check carefully to make sure there are no defective or missing parts. Improper installation may cause damage or serious injury. Do not use this product for any other purpose that is not explicitly stated in this manual. Do not exceed the weight capacity. We are not liable for damage or injury or death caused by improper mounting, improper securing of this device to prevent tipping, incorrect assembly, or inappropriate use.

TIP OVER OR CRUSHING WARNING

SERIOUS OR FATAL INJURIES CAN OCCUR:

- NEVER ALLOW ANYONE (ESPECIALLY CHILDREN) TO CLIMB, STAND, HANG, OR PLAY, OR USE ANY PART OF THIS STAND, OR ANY KIVO PRODUCT
- NEVER ROTATE THE PANEL SO THE TOP BAR IS OUTSIDE OF THE FEET – THIS CAN LEAD TO THE CENTRE OF GRAVITY OF THE PANELS BEING OUTSIDE OF THE FEET CAUSING CRUSHING OR TIP-OVER
- YOU MUST ENSURE THAT THE STAND IS SECURED WITH THE BOLT TO THE VERTICAL POST TO PREVENT THE ROTATION OF THE PANEL OUTSIDE OF THE AREA OF THE FEET.
- YOU MUST THE CORRECT BOLTS ARE USED WITH THIS PRODUCT, THAT ALL BOLTS ARE SNUG TIGHT, THAT ALL PANELS AND BARS ARE CORRECTLY POSITIONED AND SECURE.
- ONLY ONE PERSON IS NEEDED FOR 1000 OR 1500 SERIES PANELS (BUT 2 ARE RECOMMENDED) TO INSTALL A SINGLE PANEL ON A KIVO MANUAL STAND
- TWO PEOPLE ARE REQUIRED IF YOU ARE BUILDING THE DUAL PANEL STAND OR 2400 AND LARGER PANELS.
- ENSURE THE STAND IS SECURE AND CANNOT BE ROCKED OR KNOCKED OVER EASILY.
- DO NOT ROTATE THE PANELS AROUND THE VERTICAL POST OUTSIDE OF BETWEEN THE FEET
- ALWAYS BOLT THE VERTICAL POSTS TOGETHER USING THE SUPPLIED THUMB BOLTS
- IF YOU DO NOT BOLT THE VERTICAL POSTS TOGETHER TO THE BASE, THE PANEL COULD ROTATE OUTSIDE OF THE FEET, THIS COULD LEAD TO THE PANEL AND STAND TIPPING OVER.
- DO NOT USE ANY OTHER BARS OTHER THAN THE AVAILABLE DUAL PANEL ADAPTER KIT TO ATTACH PANELS TOGETHER. DO NOT USE THUMB BOLTS TO ATTACH PANELS TO THE DUAL ADAPTER KIT BARS, USE ONLY THE SUPPLIED SHORT BOLTS, DAMAGE TO INTERNALS WILL HAPPEN AND THE WARRANTY WILL BE VOIDED.

CHOKING HAZARD


- SMALL PARTS – NOT FOR CHILDREN, ADULT SUPERVISION IS REQUIRED

WEIGHT LIMIT

30KG - DO NOT EXCEED THE TOTAL WEIGHT CAPACITY FOR THIS
STAND Failure to do so may result in serious injury

Package Contents

Manual Stand



[A] Base



[B] Wheel with Brake (2)



[C] Wheel (2)




[D] Bottom Post



[E] Top Post



[F] Mounting Arm



[G] Rotating Beam
(for 5000 series panels)



[H] Beam Support
(for 5000 series panels)



[I] Thumb Bolt (7)



[J] Large Washer



[K] Small Washer



[L] Bolt (14)
(for 5000 series panels)

Dual Adapter Kit (optional)

- 2 Bars
- 8 bolts
- Allen Key


Premium Dual Adapter Kit (optional)

- 2 Bars
- 8 bolts
- Allen Key
- Y Power Splitter
- Cable Ties
- Extended Power Cable

Please ensure that your products have all of the above contents, if any item is missing or damaged, please contact us directly for replacement.

Building your Panel System


If you are using the **Kivo Manual Stand** with 1 panel, then 1 person is sufficient to construct and setup for 1000 or 1500 series panels. If you are building a dual panel configuration, or 2400 or greater series panels with the **Kivo Manual Stand**, then 2 people are required, as panels can be heavy and awkward to setup on your own, this could lead to panels falling and damage to the panels, or injury could occur.

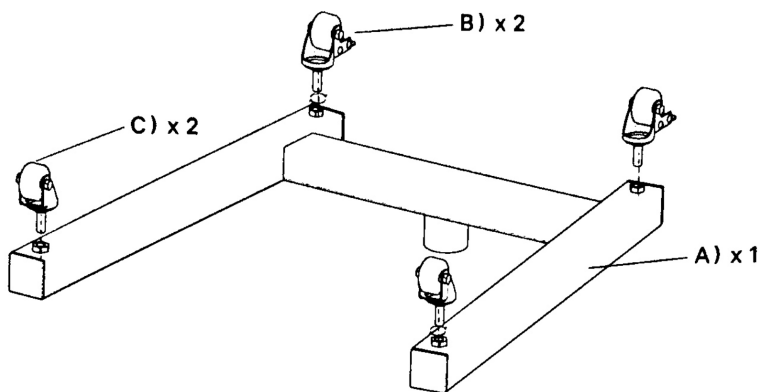


1. Place the base [A] upside down on a blanket or rug. Attach the 2 wheels with brakes [B] on the side of the base with the post base, attach the other 2 wheels [C] on the tips of the base.

Placing the wheels with the brakes at the back, allows for easy locking of the panel stand in place.


2. Turn the base upside down so the wheels are on the ground

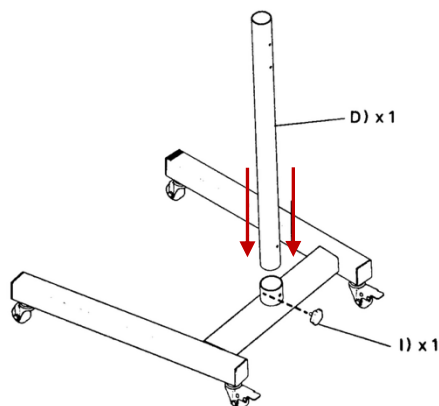


3. The vertical post [D] will have 1 bolt on one end (bottom), and 2 bolt holes on the other end (top). Place the bottom of the vertical post into the base and rotate until the holes line up for the securing thumb bolt [I]. It is important to use this bolt so the post and panel doesn't rotate outside of the centre of gravity which will cause the system to tip over, potentially leading to injury or death.

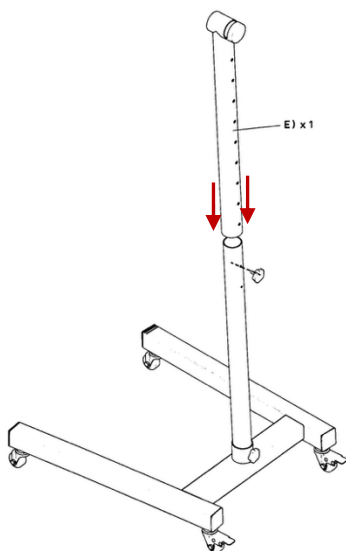

4. Slide the Top Post [E] over the Bottom Post so that the top of the bar is positioned at the height you want the panel to be at when the panel is in the horizontal position (taking into account the thickness of the panel). Rotate and lower the post until the bolt holes are aligned, and fix using a thumb bolt.

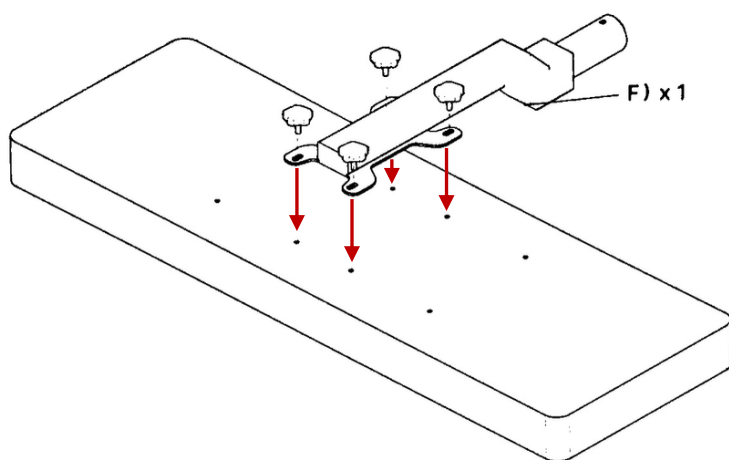

5. Place the panel onto a blanket or rug to protect the front and align the mounting arm [F] in the middle. Position the arm so the power port of the panel is placed for where you want the cord to go. You can choose to have the mounting arm on the right or the left side of the panel. Optional – if you prefer a clean appearance, you can remove the back and bottom plastic stand-off legs (with a thin cross-headed screwdriver (retain the stand-offs for future use)
6. On Single Panel systems you can use 4 of the thumb bolts [I] to fix the mounting arm to the panel – we recommend fixing them loosely first to align everything, then tightening down once all 4 are bolted in.

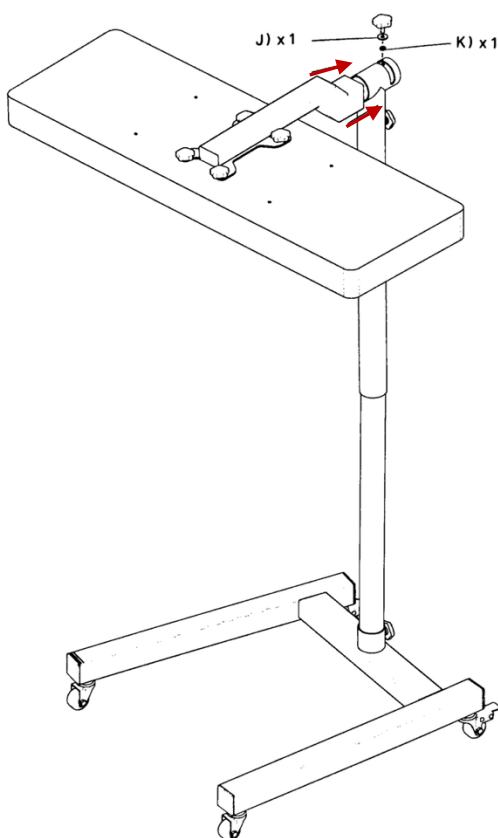

7. This is where 2 people are helpful. Slide the panel and mounting arm into the rotating head of the vertical post. Use a thumb bolt with the larger washer [J] and then the smaller washer [K] and affix into the rotator slot. The smaller bolt should slot into the rotator slot. If there is a plastic tab in the rotator slot, carefully cut the tab out using a box cutter.


Raising or Lowering the Panel

If you wish to raise or lower the stand, we recommend removing the panel and mounting arm from the rotating head of the vertical post. Remove the bolt that holds the top and bottom posts together, adjust the height, then re-bolt. Re-insert the mounting arm and panel into the top vertical post, and re-bolt the rotator thumb bolt (ensuring the washers are correctly aligned (large one to the thumb bolt head, smaller one next).

If you attempt to adjust the height of the stand whilst the panel is mounted, this could lead to the panel falling, and making it difficult to bolt (trust us, we've tried this!).

5000 or 6000 Series Panels


YOU MUST USE 2 PEOPLE TO BUILD 5000 OR 6000 SERIES PANELS, THESE ARE HEAVY AND DAMAGE OR INJURY OR DEATH COULD OCCUR.

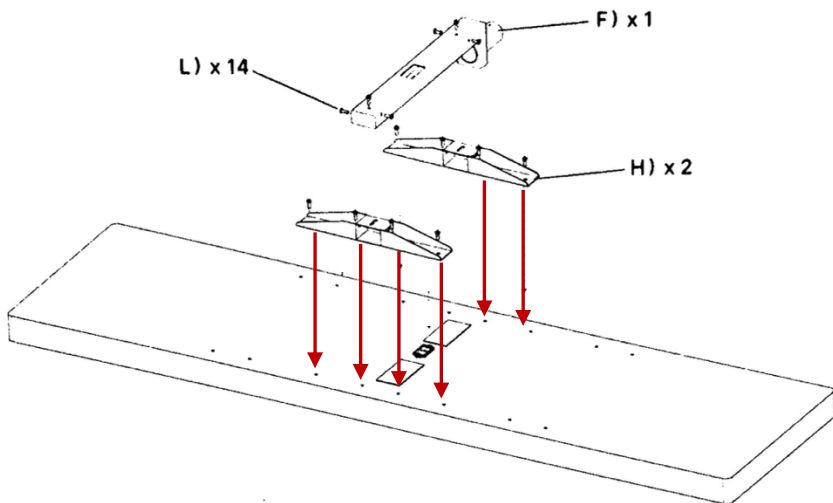

1. Place the panel face down on a blanket or rug to protect the panel.
2. Bolt the 2 panel mounts [H] using 4 of the smaller hex bolts [L] on each mount
3. Slide the mounting arm (so the round rotating section is lower than the arm – as per the image above) into the two panel mounts, align with the bolt holes on the panel mounts.
4. Bolt in the top and sides on the mounting arm to the panel.
5. Using two people, lift the panel and slide the rotating section of the mounting arm, into the rotator head of the vertical post, with one person holding the panel, and the other person holding the stand – secure the two sections with the bolt and washers (as per the single smaller panel instructions).

Dual Panel Bars


YOU MUST USE 2 PEOPLE TO BUILD 5000 OR 6000 SERIES PANELS, THESE ARE HEAVY AND DAMAGE OR INJURY OR DEATH COULD OCCUR.

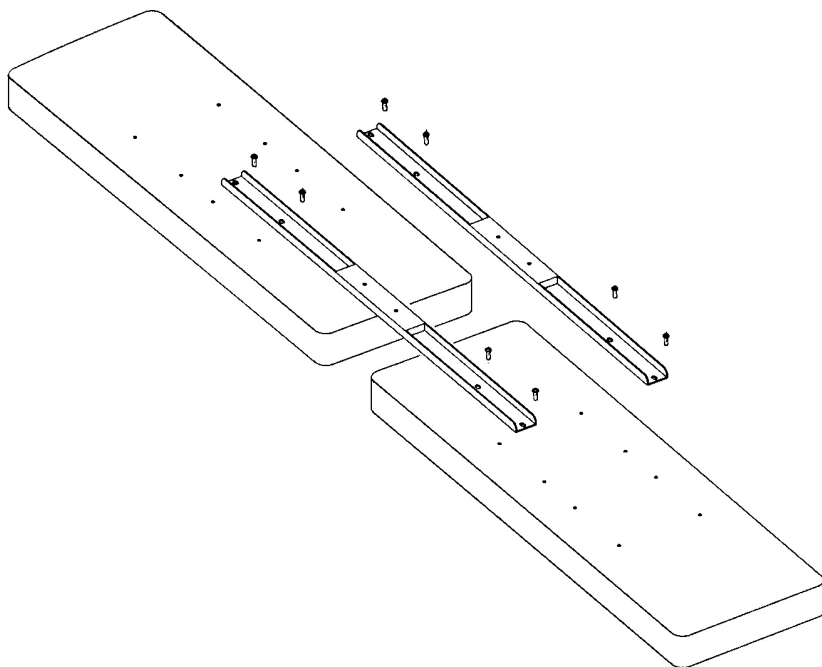


1. Place both panels upside down on a rug or blanket (to protect the front of the panel). Position the panels so the POWER SOCKETS are together, and in the middle of the two panels.

We recommend removing the back panel plastic stand-offs, but keeping the 4 stand offs that are on the bottom of each panel – these will keep the panels apart at the correct distance.

2. **YOU MUST USE THE SMALL 10MM DEEP BOLTS SUPPLIED. DO NOT USE THE THUMB BOLTS AS THESE ARE TOO LONG AND DAMAGE COULD BE CAUSED TO THE INTERNALS OF THE PANEL.** Attach and tighten using the supplied allen key. We recommend loosely bolting first to ensure everything is in the correct position, then tightening.

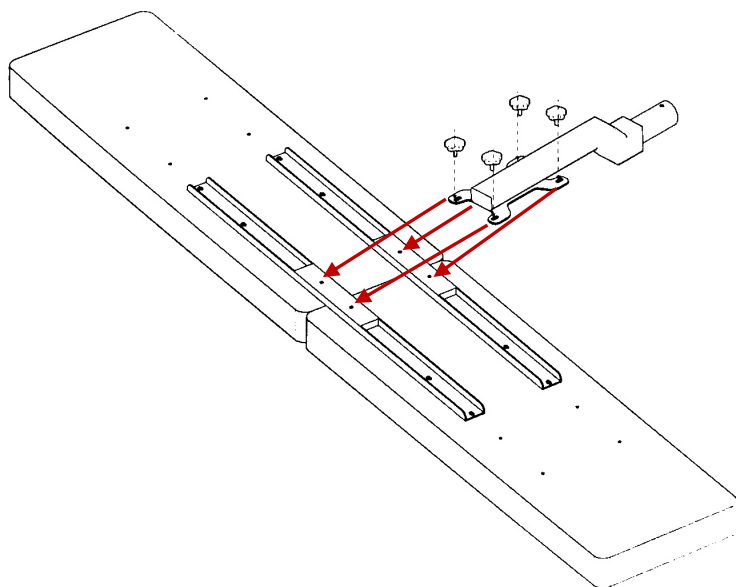

3. Using the thumb bolts [I] fix the mounting arm to the dual adapter bars – position the bar left or right depending upon your preference.
4. With 2 people, lift up the panel and slide the mounting arm into the rotator head of the vertical post. Use a thumb bolt with the larger washer [J] and then the smaller washer [K] and affix into the rotator slot. The smaller bolt should slot into the rotator slot. If there is a plastic tab in the rotator slot, carefully cut the tab out using a box cutter.

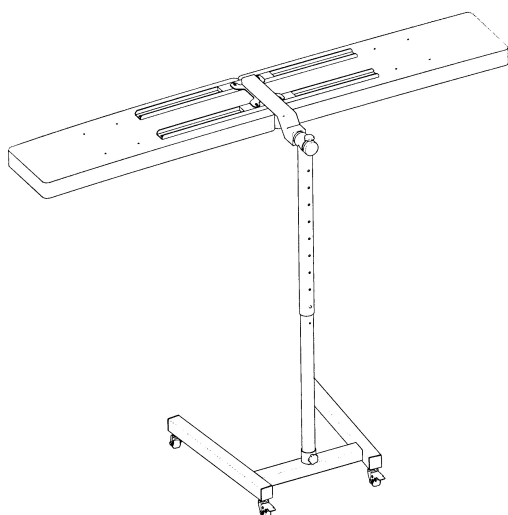

Power

With a single panel setup, we recommend attaching the power cable, and rotating around the panel from vertical to horizontal to make sure the power cable doesn't catch, and then securing the cable to the stand with tape at the top and bottom of the vertical post.

With a dual panel, if you have the optional premium dual panel kit, you can use a single power cable and attach the Y splitter, then fix the single cable to the top and bottom of the vertical post with the enclosed cable wraps, ensuring the cable is free to move when the panels are rotated from horizontal to vertical.

If you are using 2 power cables without the premium dual panel kit, then attach both cables, and fix to the panel with tape ensuring the panels can rotate freely.

ENSURE THE PANELS CAN ROTATE FREELY WITHOUT PLACING STRAIN ON THE POWER CABLE / POWER PORT OR CATCHING THE CABLE IN ANY PART OF THE STAND.

WE RECOMMEND USING A SURGE SUPRESSED POWER OUTLET TO EXTEND THE LIFE OF YOUR PANELS.

If the power cable is too short to reach an electrical outlet, then you can purchase a longer cable from us, or use an extension cable.

Specifications

Manual Stand

Main Construction: Steel
Weight: 9kg
Max Load: 30kg

Dual Panel Adapter Kit

Main Construction: Steel
Weight: 1kg
Max Load: 30kg